


SOLAR LIGHTING SYSTEM LFP BATTERY SYSTEM W/ 80W LIGHTING FIXTURE



Choose Any Neptun LED Fixture

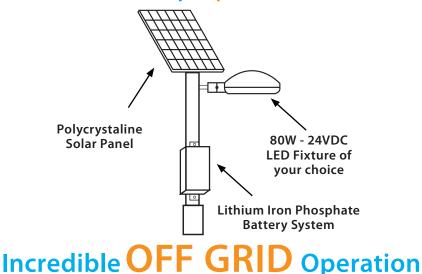

GENERAL DESCRIPTION

Neptun's LFP Solar Lighting Systems feature a long life, fully rechargeable unit that allows for complete OFF GRID operation. The exceptional storage system allows for up to 3 Days Autonomy / use without a single recharge. Neptun's solar lighting systems are ideal solutions for areas where electricity is unavailable or you need to eliminate many of the high costs associated with standard lighting installations.

APPLICATION

- Street & Area Lighting
- Billboard & Sign Lighting
- Flood Lighting
- Building Accent Lighting
- Park Lighting
- Security Lighting

ORDERING INFORMATION

STRUCTURE, MATERIALS, & FEATURES

- 80W High Output Neptun LED fixture of your choice.
- Battery enclosure with die-cast aluminum housing and mounting system.
- 180Ah LFP (Lithium Iron Phosphate) battery with 5,000 cycles estimated life.
- High efficency driver & MPPT charge controller supplied with fixture.
- 250W Polycrystalline Solar Panel with slip-fitter mounting brackets.
- Corrosion resistant electrocoat finish (custom colors available).
- All enclosures and mounting systems feature stainless steel hardware.
 Square or Round pole mounting brackets included.
- Square or Round pole mounting brackets in E Year Warranty on complete system
- 5 Year Warranty on complete system
- Compatible with any Neptun LED 24VDC lighting fixtures.

Sample Number: LED-XXX-24VDC-NE-SLR80-LFP-24VDC-RPM-GRY Custom options and accessories available. Please consult factory

Fixture	System	Battery Mounting	Color
	-	-	-
LED-XXX080-24VDC = Choose any 80W Fixture from Neptun's outdoor or indoor catalog or multiple fixtures totaling 80W	NE-SLR80-LFP-24VDC = Solar System for 80W LED fixture. * Includes 250W PPV Solar Panel, 180Ah 24VDC LFP Battery system, all mounting hardware, and wiring	RPM = Round Pole Mount SQPM = Square Pole Mount FSM = Free Standing Ground Mount (for flood, billboard, or wall mounting applications)	GRY = Grey BRZ = Bronze ** Custom Colors Available



lightinnovations@work™

service@neptunlight.com

www.NeptunLight.com

888.735.8330

<u>NEPTUN</u>

SOLAR LIGHTING SYSTEM LFP BATTERY SYSTEM W/ 80W LIGHTING FIXTUR

FIXTURE SPECIFICATIONS Choose Any Neptun LED Fixture

Type :	LED (See product sheet for full specification)	
Wattage:	80W	
Projected (L70) @ 25°C :	> 100,000 hrs.	
Lumens per Watt :	> 100	
Input Line Voltage :	24 vdc	
Max Line Current :	3.49A	

CHARGE CONTROLLER SPECIFICATIONS

Type :	Programmable Intelligent MPPT (Included in fixture)
Voltage:	12 vdc or 24 vdc
Output Current :	2400mA
Overvoltage Protection :	(24V) 32.0V
Efficiency of Constant Current :	90% ~ 96%
Operating Temp. :	-40°C ~ +70°C
IP Rating :	IP68

BATTERY SPECIFICATIONS

Battery Type:	Sealed Lithium Iron Phosphate (LFP)
Weight :	210 lbs. (includes enclosure and mounting arm)
Dimensions :	(Pole) 13.00"L x 10.00"W x 28.00"H (Gnd.) 25.00"L x 9.50"W x 13.50"H
EPA Rating :	2.43 ft. ²
Design Life :	15 Years (5,000 cycles)
Usage :	Solar / Wind System
Maintenance :	Maintenance Free
Nominal Capacity :	180Ah
Voltage :	24 vdc
Discharge Cutoff :	Auto @ 20% Capacity
Charge Operating Temp. :	0°C ~ 45°C
Storage Temp. :	-20°C ~ 55°C
Storage Humidity :	< 85%
UL Standard 1703 :	Yes
Warranty :	5 Years



Facade Lighting





Street Lighting

Flood Lighting



Billboard Lighting



Security Lighting



Pole Mount (RPM/SPM)


Ground Mount (FSM)






SOLAR PANEL SPECIFICATIONS

Type :	Polycrystaline - Low-iron solar glass front panel w/ anti-reflective surface
Cell Arrangement :	60 (6 x 10)
Wattage :	250w
Frame :	Silver Anodized Aluminum Alloy
Mounting :	Adjustable Slip Fitter
Weight :	65 lbs. (including mounting brackets)
Dimensions :	39.25"L x 2.00"W x 66.50"H
Operating Module Temp. :	-40°C ~ +85°C
Positive Power Tolerance :	0 ~ +5w
Nominal Power (WP) :	≥ 250w
Voltage @ Normal Power :	30.8V
Current @ Normal Power :	8.14A
Open-Circuit Voltage :	37.5V
Short-Circuit Current :	8.67A
Maximum System Voltage :	600 vdc
Maximum Reverse Current :	15A
Module Efficiency :	15.05%
EPA Rating :	16.8 ft. ²
Product Warranty :	10 Year
Performance Warranty :	25 Year @ 80% output







Adjustable Slip Fitter

Neptun Light, Inc. 13950 Business Center Drive Lake Forest, IL 60045 Fax: 847.735.8004

Neptun Light, Inc. reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program. ©2002-2013 Neptun Light, Inc. All rights reserved. Spec. Rev. 10-2015

service@neptunlight.com

www.NeptunLight.com

888.735.8330