




FULL SPECTRUM LIGHTING

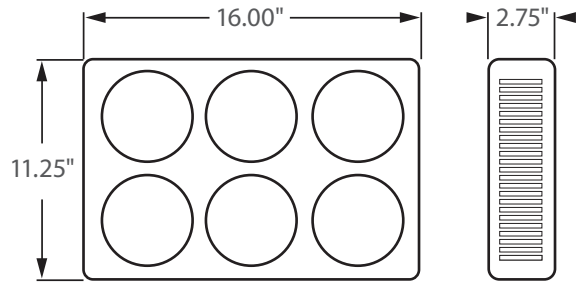

Incredible 100,000 hrs

GENERAL DESCRIPTION

Neptun's 6 lamp LED grow light fixture features a full spectrum lighting design to be used in plant growth applications. The LED-GL6 series fixture features excellent optics and its rugged design allows for use in a variety of indoor growing applications. Low operating temperature and high efficiency design allows for optimal energy savings vs. metal halide and HPS lighting systems.

APPLICATION

- Plant growth lighting

STRUCTURE, MATERIALS, & FEATURES

- Heavy-gauge, die-cast aluminum housing.
- Corrosion resistant electrocoat black finish.
- 4 mounting hooks with adjustable Gripple hanging system.
- On / Off power switch with detachable power cord.
- LED engine design with Advanced Thermal Management.
- High Output full spectrum COB LED's.
- High power factor, low THD driver.
- Full spectrum wave length (370nm - 850nm)
- Instant-On flicker-free Cold Start and Hot Re-Start.
- Up to 15 year maintenance free operation.
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)

ORDERING INFORMATION

Sample Number: LED-GL6-300-UNV-FS-C3
 Custom options and accessories available. Please consult factory

| Series | Wattage | Voltage | Color Temp | Accessories |
|---------------------------------------|-------------|---|--------------------|---|
| LED-GL6 = Grow Light Fixture - 6 Lamp | 300 = 300 W | UNV = 120-277 VAC 347V = 347 VAC 480V = 480 VAC | FS = Full Spectrum | C3* = 3' Cord-No Plug (other lengths available C6 = 6' cord) PC3 = 3' Cord with NEMA Plug (verify plug type when ordering) |



lightinnovations@work™

PRODUCT INFORMATION


| Model No. | Description | Rated Watts | Input Watts | Delivered Lumens | Universal Line Voltage (VAC) | Max Line Current (Amp) @ 120 - 277 | THD | Power Factor | Weight |
|-----------------|------------------------|-------------|-------------|------------------|------------------------------|------------------------------------|------|--------------|--------|
| LED-GL6-300-UNV | LED Grow Light Fixture | 300 | 302 | 10,920 | 120-277 | 2.62 - 1.13 | <20% | >0.90 | 18 lbs |

SPECIFICATIONS

- LED Driver Constant Current
- Power Supply 350mA
- Driver UL Rating Class 1
- Driver UL Outdoor Rated Wet Location
- Start Method InstantON
- Hot Re-start InstantON
- Universal Input Line Voltage 120-277 VAC
- Input Line Frequency 50/60 Hz
- Ballast Off-State Draw 0 Watts
- Sound Rating Class A
- Projected (L70) @ 25°C > 100,000 hrs.
- Color Temperatures Full Spectrum
- P.A.R Range 370nm - 850nm
- Minimum Starting Temperature -20°C
- Maximum Starting Temperature +40°C
- Per Value/200mm 2,453.8 Umol
- Shock / Vibration Resistant Yes
- Power Factor > 0.90
- Total Harmonic Distortion < 20%
- Inrush Current Peak < 10 Amp
- FCC Compliance Part 15, Subp. C
- Optics IP Rating IP68
- Driver IP Rating IP67
- Warranty 5 Year

FULL SPECTRUM LED

Full Spectrums: UV380 (1pcs.), IR730 (1pcs.), 6500K (2pcs.), 440NM (4pcs.), 460NM (6pcs.), 580NM (1pcs.), 610NM (1pcs.), 630NM (4pcs.), 660NM (10 pcs.)

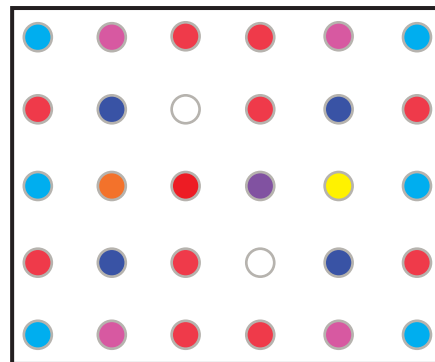

- 660nm 10PCS
- 400nm 1PCS
- 630nm 4PCS
- 730nm 1PCS
- 610nm 1PCS
- 6500°K 2PCS
- 440nm 4PCS
- 560nm 1PCS
- 460nm 6PCS

MOUNTING OPTIONS


Hanging Mount



Gripple Hangers Supplied



FULL SPECTRUM



Neptun Light, Inc.
13950 Business Center Drive
Lake Forest, IL 60045
Fax: 847.735.8004

Neptun Light, Inc. reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.
©2002-2016 Neptun Light, Inc. All rights reserved. Spec. Rev. 7-2017