

23.6"/600mm

7.8"/200mm

## **Specifications**

**Initial Capacity**13.5 kWh

Capacity Maintenance
93% after 10,000 cycles

DOD Operating Temperature

100% -30 C to +50 C

Nominal Voltage Power Draw

48.0 VDC 12 kW Continuous

InstallationWeightWall/Floor275lbs/125kgIndoor/Outdoor

Warranty Cycle Life

20 Years 20,000 @ 80% DOD


## **Features**

- Service life up to 25 years
- Power grid outage solution for home or office
- Grid or Solar charging

55.1"/1400mm

- On-Grid Demand Response Networked Source
- Certification Standards:
  - UL 642
- EC 62619/UL 1973
- Grid Code compliant

## Part of Utility Owned Cloud controlled Energy Network

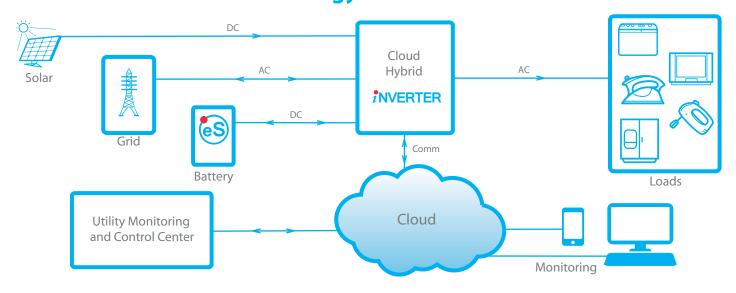

Copyright 2017-2018 Neptun Energy Networks • info@neptunenergynetworks.com